

# Certified Safety Capacitors X<sup>2</sup>, Y<sup>3</sup> & X<sup>1</sup>, Y<sup>2</sup>

X<sup>2</sup>, Y<sup>3</sup> (LS style) and X<sup>1</sup>, Y<sup>2</sup> (ES style) Class Compliant\* chip capacitors specifically designed for use in modem, facsimile, telephone and other electronic equipment where lightning or overvoltage surges can occur. Both styles are rated at 250 Vac safety approved with COG (NP0) and X7R dielectrics available (dependant on style).

X<sup>2</sup>, Y<sup>3</sup> (LS style) is certified to EN 60950 and compliant to Standards EN 132400: 1994/A2: 1998/IEC60384-14, Second Edition: 1993/A1:1995.


X<sup>1</sup>, Y<sup>2</sup> (ES style) is certified to IEC60384-14, Second Edition: 1993/A1:1995 and compliant to Standards EN 132400: 1994/A2:1998.

Both styles meet the requirements of EN61000-4-5, IEC1000-4-5 and IEC801-4-5.

## Certification numbers

Safety Classification	X <sup>2</sup> , Y <sup>3</sup>		X <sup>1</sup> , Y <sup>2</sup>	
TUV	LS 1808N - R9972698.01,02,03 LS 1808B - R2272835.01,.02	LS 1812N - R9972698.05	ES 1808 - R60012089	ES 2211, ES 2215 - R2072738.01 ES 2225 - R2072738.02
Standards	EN 132400, EN 60950, IEC 60384-14 2nd Edition, Class X <sup>2</sup> Y <sup>3</sup> .		EN 132400, IEC 60384-14 2nd Edition, Class X <sup>1</sup> Y <sup>2</sup>	
UL	NWGQ2.E208336 and NWGQ8.E208336			

\*LS style is compliant with Robustness of Termination (cl 4.3) test according to IEC 60384-1 amendment 3 cl 4.34 and 4.35 Resistance to Soldering Heat (cl 4.4) tested according to IEC 60384-1 amendment 3 cl. 4.14.2, Impulse Test made with 2.5 KV or 5.0KV as required according to 6.4.2.1 in EN 60950. The creepage distance between live parts of different polarity meets the requirements of IEC 60950.

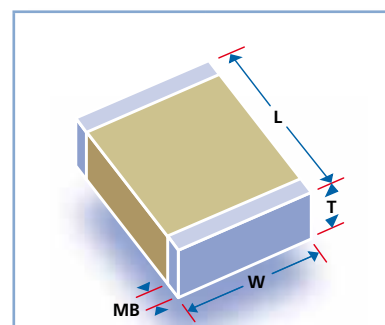

## Dimensions - inches/mm


Safety Classification	X <sup>2</sup> , Y <sup>3</sup>		X <sup>1</sup> , Y <sup>2</sup>			
Size	LS 1808	LS 1812	ES 1808	ES 2211	ES 2215	ES 2225
<b>L</b> inches ±0.015/0.38: mm ±0.015/0.38:	0.180 4.57	0.180 4.57	0.180* 4.57	0.220 5.58	0.220 5.58	0.220 5.58
<b>W</b> inches ±0.02: mm ±0.508:	0.080 2.03	0.125 3.18	0.080** 2.03	0.110 2.79	0.150 3.81	0.250 6.35
<b>MB</b> inches: typical mm:	0.024 0.609	0.024 0.609	0.020 5.08	0.300 0.762	0.300 0.762	0.300 0.762
<b>Creepage</b> inches: min mm:	0.102 2.60	0.102 2.60	0.100 2.50	0.157 3.99	0.157 3.99	0.157 3.99

\*Tolerance is ±0.014/0.35 \*\*Tolerance is ±0.012/0.30

## How to Order - Certified Safety Capacitors

LS	1808	N	122	K	302	N	X080	T	M
<b>STYLE</b> LS = X <sup>2</sup> , Y <sup>3</sup> ES = X <sup>1</sup> , Y <sup>2</sup>	<b>SIZE</b> See Chart	<b>DIELECTRIC</b> N = COG B = X7R	<b>CAPACITANCE</b> Value in Picofarads. Two significant figures, followed by number of zeros: 121 = 120pF	<b>TOLERANCE</b> J = ± 5% K = ± 10% M = ± 20%	<b>VOLTAGE-SURGE</b> Two significant figures, followed by number of zeros: 302 = 3000V (X <sup>2</sup> , Y <sup>3</sup> ) 502 = 5000V (X <sup>1</sup> , Y <sup>2</sup> )	<b>TERMINATION</b> N = Nickel Barrier	<b>THICKNESS OPTION</b> Blank = Standard thickness X = special thickness, specified in inches: X080 = 0.08" X100 = 0.10" X010 = 0.11" X150 = 0.15"	<b>PACKING</b> No suffix = Bulk T = Tape & Reel	<b>MARKING</b> Parts marked: NLS (X <sup>2</sup> , Y <sup>3</sup> ) NY2 (X <sup>1</sup> , Y <sup>2</sup> )

# Certified Safety Capacitors X<sup>2</sup>, Y<sup>3</sup> & X<sup>1</sup>, Y<sup>2</sup>

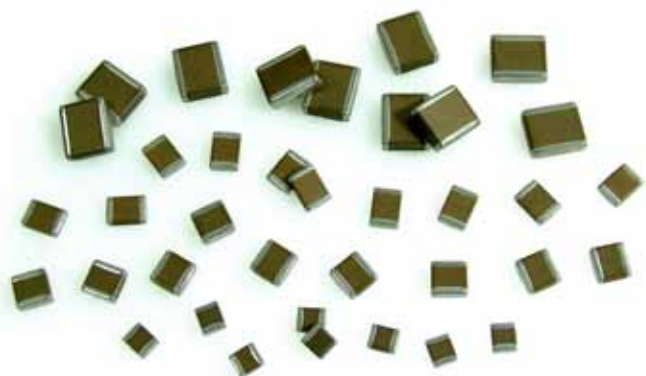

- For dielectric characteristics see page 4 & 7.
- Nickel Barrier terminations.
- Capacitance tolerances available ±5%, ±10%, ±20%

**Note:** Capacitance values are shown below as 3 digit code: 2 significant figures followed by the no. of zeros e.g. 183 = 18,000pF.


## Capacitance values

Safety Classification		X <sup>2</sup> , Y <sup>3</sup>					X <sup>1</sup> , Y <sup>2</sup>					
Size		LS 1808		LS 1812			ES 1808		ES 2211	ES 2215	ES 2225	
Tmax	inches: mm:	0.065 1.65	0.080* 2.03	0.065 1.65	0.065 1.65	0.100* 2.54	0.080* 2.03	0.157* 4.00	0.157* 4.00	0.157* 4.00		
Dielectric		COG/NPO		X7R	COG/NPO			COG/NPO	X7R	COG/NPO	COG/NPO	COG/NPO
4R7							•					
5R0		•					•	•				
6R8		•					•	•				
8R2		•					•	•				
100		•					•	•				
120		•					•	•				
150		•					•	•				
180		•					•	•				
220		•					•	•				
270		•					•	•				
330		•					•	•				
390		•					•	•				
470		•					•	•				
560		•					•	•				
680		•					•	•				
820		•					•	•				
101		•					•	•				
121		•					•	•				
151		•		•			•	•	•			
181		•		•			•	•	•			
221		•		•			•	•	•			
271		•		•			•	•	•			
331		•		•			•	•	•			
391		•		•			•	•	•			
471		•		•			•	•	•			
561		•		•			•	•	•			
681		•		•			•	•	•			
821			•	•			•	•	•			
102			•	•	•		•	•	•	•		•
122				•	•							
152				•	•							
182						•						
222						•						

\* Denotes non standard chip thickness.  
Order code needs to have an 'X' inserted together with the dimension in inches -e.g. X080 where dimension is 0.080"


## COG/NP0 (N) Ultra Stable

Operating temperature range:	-55°C to 125°C
Temperature coefficient:	0 ±30 ppm/°C
Dissipation factor:	0.1% max @ 25°C
Insulation resistance	@25°C: >100GΩ or >1000ΩF whichever is less @125°C: >10GΩ or >100ΩF whichever is less
Dielectric withstanding voltage	≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C 1MHz for Capacitance ≤100pF

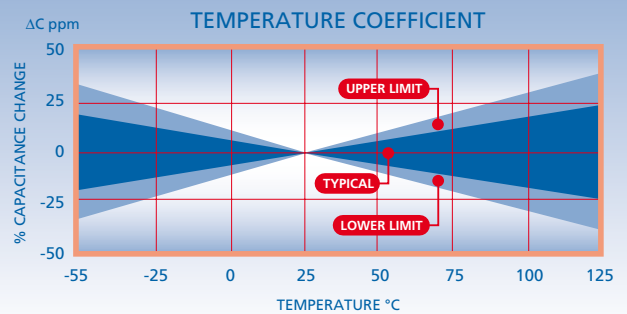


## COG/NP0 (M) Ultra Stable Non Magnetic

Operating temperature range:	-55°C to 125°C
Temperature coefficient:	0 ±30 ppm/°C
Dissipation factor:	0.1% max @ 25°C
Insulation resistance	@25°C: >1000ΩF or >10000ΩF whichever is less @125°C: >100ΩF or >1000ΩF whichever is less
Dielectric withstanding voltage	≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C 1MHz for Capacitance ≤100pF

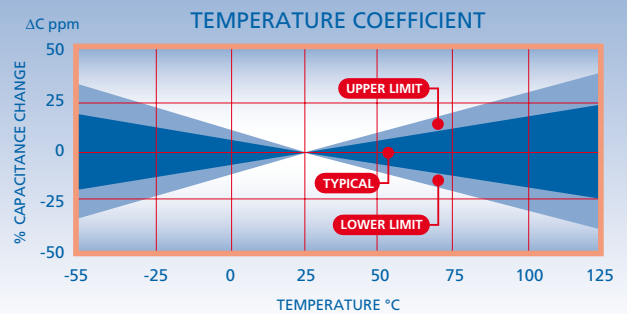


## COG/NP0 (F) Ultra Stable High Temperature (up to 160°C)

Operating temperature range:	-55°C to 160°C
Temperature coefficient:	0 ±30 ppm/°C
Dissipation factor:	0.1% max @ 25°C
Insulation resistance	@25°C: >100GΩ or >1000ΩF whichever is less @160°C: >1GΩ or >10ΩF whichever is less
Dielectric withstanding voltage	<200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C 1MHz for Capacitance ≤100pF

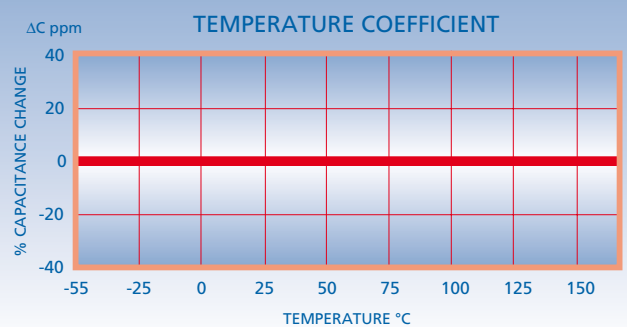

## COG/NP0 (D) Ultra Stable High Temperature (up to 200°C)

Operating temperature range:	-55°C to 200°C
Temp. coefficient ≤200°C:	0 ±30 ppm/°C
Dissipation factor @ 25°C:	0.1% Max.
Insulation resistance	@25°C: >100GΩ or >1000ΩF whichever is less @200°C: >1GΩ or >10ΩF whichever is less
Dielectric withstanding voltage	≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C 1MHz for capacitance ≤100pF

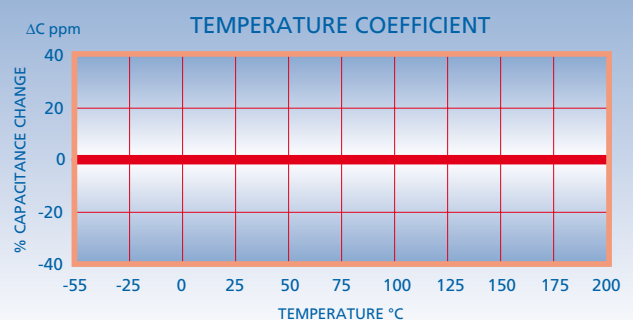


# Dielectric Characteristics




## Class II (G) Stable High Temperature (up to 160°C)

Operating temperature range:	-55°C to 160°C
Temperature coefficient up to 160°C:	+15 -40% ΔC Max.
Dissipation factor @ 25°C:	2.5% Max.
Insulation resistance	@25°C: >100GΩ or >1000ΩF whichever is less @160°C: >1GΩ or >10ΩF whichever is less
Dielectric withstanding voltage	≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	< 2.0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C

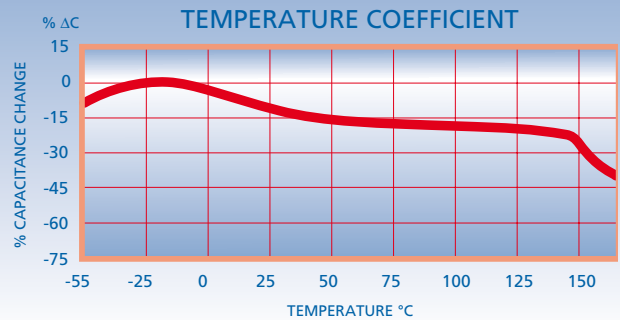


## Class II (E) Stable High Temperature (up to 200°C)

Operating temperature range:	-55°C to 200°C
Temperature coefficient up to 200°C:	+15 -65% ΔC Max.
Dissipation factor @ 25°C:	2.5% Max.
Insulation resistance	@25°C: >100GΩ or >1000ΩF whichever is less @200°C: >1GΩ or >10ΩF whichever is less
Dielectric withstanding voltage	≤200V: 250% 201-500V: 150% or 500V whichever is greater >500V: 120% or 750V whichever is greater
Ageing rate:	< 2.0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C

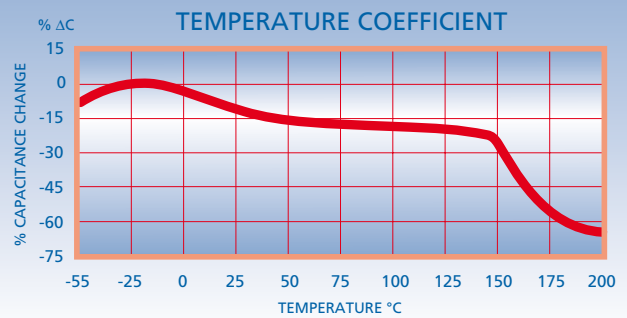


## X5R (W) Stable


Operating temperature range:	-55°C to 85°C
Temperature coefficient up to 200°C:	±15% ΔC Max.
Dissipation factor @ 25°C:	See page 44
Insulation resistance @25%:	>10GΩ or >500ΩF whichever is less
Dielectric withstanding voltage:	250%
Ageing rate:	< 5.0% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C Except: 22μF, 47μF & 100μF

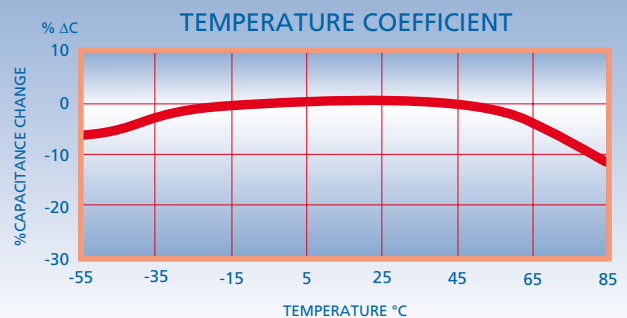

## Positive VTC (P) Pulse Power

Operating temperature range:	-55°C to 85°C (derate at 125°C)
Temperature coefficient	-55°C to 85°C: 3000 ±1000 ppm/°C +25°C to +125°C: 7000 ±1000 ppm/°C
Dissipation factor @ 25°C:	1.0% Max.
Insulation resistance	@25°C: >10GΩ or >100ΩF whichever is less @125°C: >1GΩ or >10ΩF whichever is less
Dielectric withstanding voltage:	Rated voltage +100V
Ageing rate:	<2% per decade
Test parameters:	1KHz, 1.0 ±0.2 VRMS, 25°C

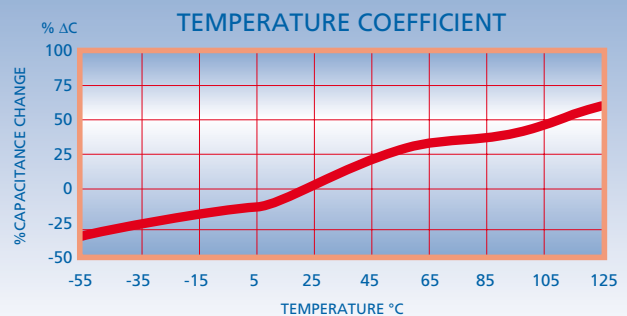

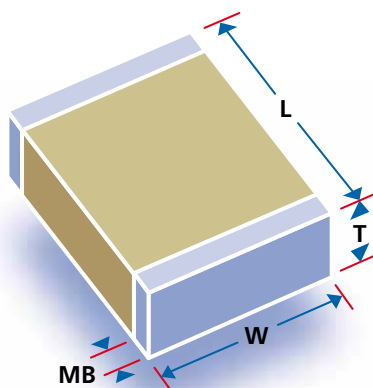

## Dimensions - inches (mm)

Size	Length (L)	Width (W)	Max. Thickness (T)*	Termination Band (MB)
0402	0.040 ± 0.004 (1.02 ± 0.102)	0.020 ± 0.004 (0.508 ± 0.102)	0.024 (0.610)	0.010 ± 0.006 (0.254 ± 0.152)
0504	0.050 ± 0.006 (1.27 ± 0.152)	0.040 ± 0.006 (1.02 ± 0.152)	0.044 (1.12)	0.014 ± 0.006 (0.356 ± 0.152)
RF0505	0.055 +0.015 -0.010 (1.4 +0.38 -0.25)	0.055 ± 0.015 (1.40 ± 0.381)	0.057 (1.45)	0.014 ± 0.006 (0.356 ± 0.152)
0603	0.060 ± 0.006 (1.52 ± 0.152)	0.030 ± 0.006 (0.762 ± 0.152)	0.035 (0.889)	0.014 ± 0.006 (0.356 ± 0.152)
0805	0.080 ± 0.008 (2.03 ± 0.203)	0.050 ± 0.008 (1.27 ± 0.203)	0.054 (1.37)	0.020 ± 0.010 (0.508 ± 0.254)
0907	0.090 ± 0.008 (2.29 ± 0.203)	0.070 ± 0.008 (1.78 ± 0.203)	0.060 (1.52)	0.020 ± 0.010 (0.508 ± 0.254)
1005	0.100 ± 0.008 (2.54 ± 0.203)	0.050 ± 0.008 (1.27 ± 0.203)	0.054 (1.37)	0.020 ± 0.010 (0.508 ± 0.254)
RF1111	0.110+0.025 -0.010 (2.79 +0.64 -0.25)	0.110 ± 0.015 (2.79 ± 0.381)	0.102 (2.59)	0.020 ± 0.010 (0.508 ± 0.254)
1206	0.125 ± 0.008 (3.18 ± 0.203)	0.060 ± 0.008 (1.52 ± 0.203)	0.064 (1.63)	0.020 ± 0.010 (0.508 ± 0.254)
1210	0.125 ± 0.008 (3.18 ± 0.203)	0.100 ± 0.008 (2.54 ± 0.203)	0.065 (1.65)	0.020 ± 0.010 (0.508 ± 0.254)
1515	0.150 ± 0.015 (3.81 ± 0.381)	0.150 ± 0.015 (3.81 ± 0.381)	0.130 (3.30)	0.030 ± 0.015 (0.762 ± 0.381)
1808	0.180 ± 0.012 (4.57 ± 0.305)	0.080 ± 0.008 (2.03 ± 0.203)	0.065 (1.65)	0.024 ± 0.014 (0.610 ± 0.356)
1812	0.180 ± 0.012 (4.57 ± 0.305)	0.125 ± 0.008 (3.18 ± 0.203)	0.065 (1.65)	0.024 ± 0.014 (0.610 ± 0.356)
1825	0.180 ± 0.012 (4.57 ± 0.305)	0.250 ± 0.015 (6.35 ± 0.381)	0.080 (2.03)	0.024 ± 0.014 (0.610 ± 0.356)
2020	0.200 ± 0.015 (5.08 ± 0.381)	0.200 ± 0.015 (5.08 ± 0.381)	0.180 (4.57)	0.024 ± 0.014 (0.610 ± 0.356)
2221	0.220 ± 0.015 (5.59 ± 0.381)	0.210 ± 0.015 (5.33 ± 0.381)	0.080 (2.03)	0.030 ± 0.015 (0.762 ± 0.381)
2225	0.220 ± 0.015 (5.59 ± 0.381)	0.250 ± 0.015 (6.35 ± 0.381)	0.080 (2.03)	0.030 ± 0.015 (0.762 ± 0.381)
2520	0.250 ± 0.015 (6.35 ± 0.381)	0.200 ± 0.015 (5.08 ± 0.381)	0.180 (4.57)	0.030 ± 0.015 (0.762 ± 0.381)
RF2525	0.230 +0.020 -0.012 (5.84 +0.51 -0.30)	0.250 ± 0.015 (6.35 ± 0.381)	0.165 (4.19)	0.030 ± 0.015 (0.762 ± 0.381)
3333	0.330 ± 0.017 (8.38 ± 0.432)	0.330 ± 0.017 (8.38 ± 0.432)	0.250 (6.35)	0.030 ± 0.015 (0.762 ± 0.381)
3530	0.350 ± 0.018 (8.89 ± 0.457)	0.300 ± 0.015 (7.62 ± 0.381)	0.250 (6.35)	0.030 ± 0.015 (0.762 ± 0.381)
4040	0.400 ± 0.020 (10.2 ± 0.508)	0.400 ± 0.020 (10.2 ± 0.508)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)
4540	0.450 ± 0.023 (11.4 ± 0.584)	0.400 ± 0.020 (10.2 ± 0.508)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)
5440	0.540 ± 0.027 (13.7 ± 0.686)	0.400 ± 0.020 (10.2 ± 0.508)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)
5550	0.550 ± 0.028 (14.0 ± 0.711)	0.500 ± 0.025 (12.7 ± 0.635)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)
6560	0.650 ± 0.033 (16.5 ± 0.838)	0.600 ± 0.030 (15.2 ± 0.762)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)
7565	0.750 ± 0.038 (19.1 ± 0.965)	0.650 ± 0.033 (16.5 ± 0.838)	0.300 (7.62)	0.040 ± 0.020 (1.02 ± 0.508)

\* Non standard thicknesses are available - consult the sales office for details.